



New  
Composite  
Technologies



Illumination of pedestrian crossings

[www.nct.global/en](http://www.nct.global/en)

## MAIN ADVANTAGES



Non electric conduction



Eco-friendly



Easy to assembly and disassembly



High mechanical resistance



Low weight



Slow-burning



UV protection

## BASICPOLE

MOUNTED ON THE FOUNDATION SKPF

Pole symbol	H (m)	BD (mm)	TD (mm)	CP (mm)	BPL (m)	BPHD (m)
SKPF 5,0	5,0	130	60	130	275	200
SKPF 5,0	5,0	150	60	130	275	200
SKPF 6,0	6,0	150	60	130	275	200
SKPF 7,0	7,0	150	60	130	275	200

Possibility to produce poles with non-standard parameters, as well as additional reinforcement for difficult operating conditions.

## COLOURS



RAL 7032



RAL 7047



RAL 7035



RAL 7042



RAL 7024



RAL 7016




RAL 9005



RAL

Ask about the options if other solutions are needed.

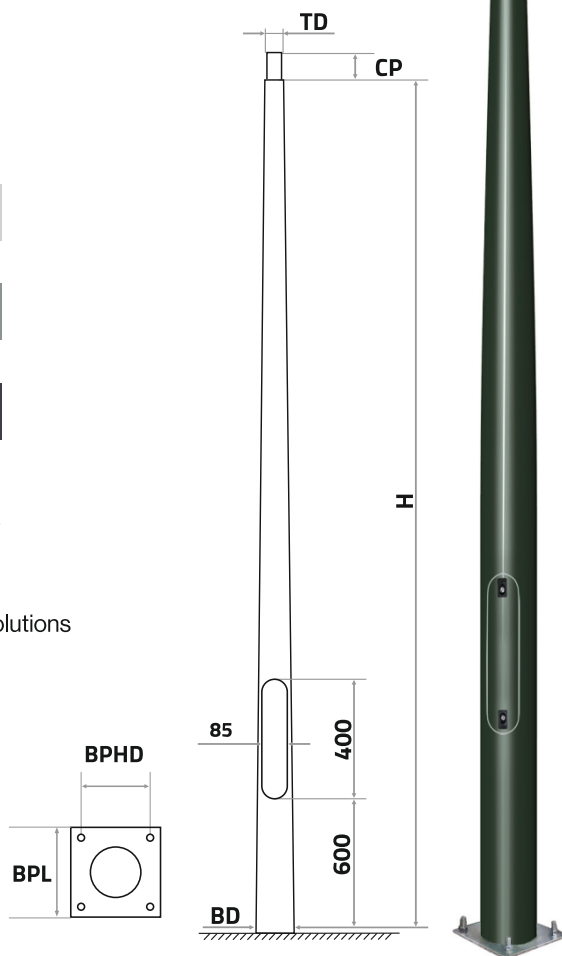

## LIGHTING FIXTURE


CORDOBA LED 3.0I



45	6750	5700K	>70	IP66	4,0kg

## ALUMINIUM BRACKET WJ1

Single, inclination angle 0° - 20°



Single bracket (one sided) WJ1

Bracket symbol	BL (mm)	ID (mm)	BU (mm)	weight (kg)
WJ1/60/5/500	500	60	200	1,8



System zarządzania ISO 9001:2015

www.tuv.com ID 900020954

Contact us

www.nct.global/en | e-mail: export@nct.global | tel.: +48 32 45 30 316 ext. 210